
DHANVIQUE®

AludecoR
Metal Composite Panel

ZINCHO


Everlasting Elegance

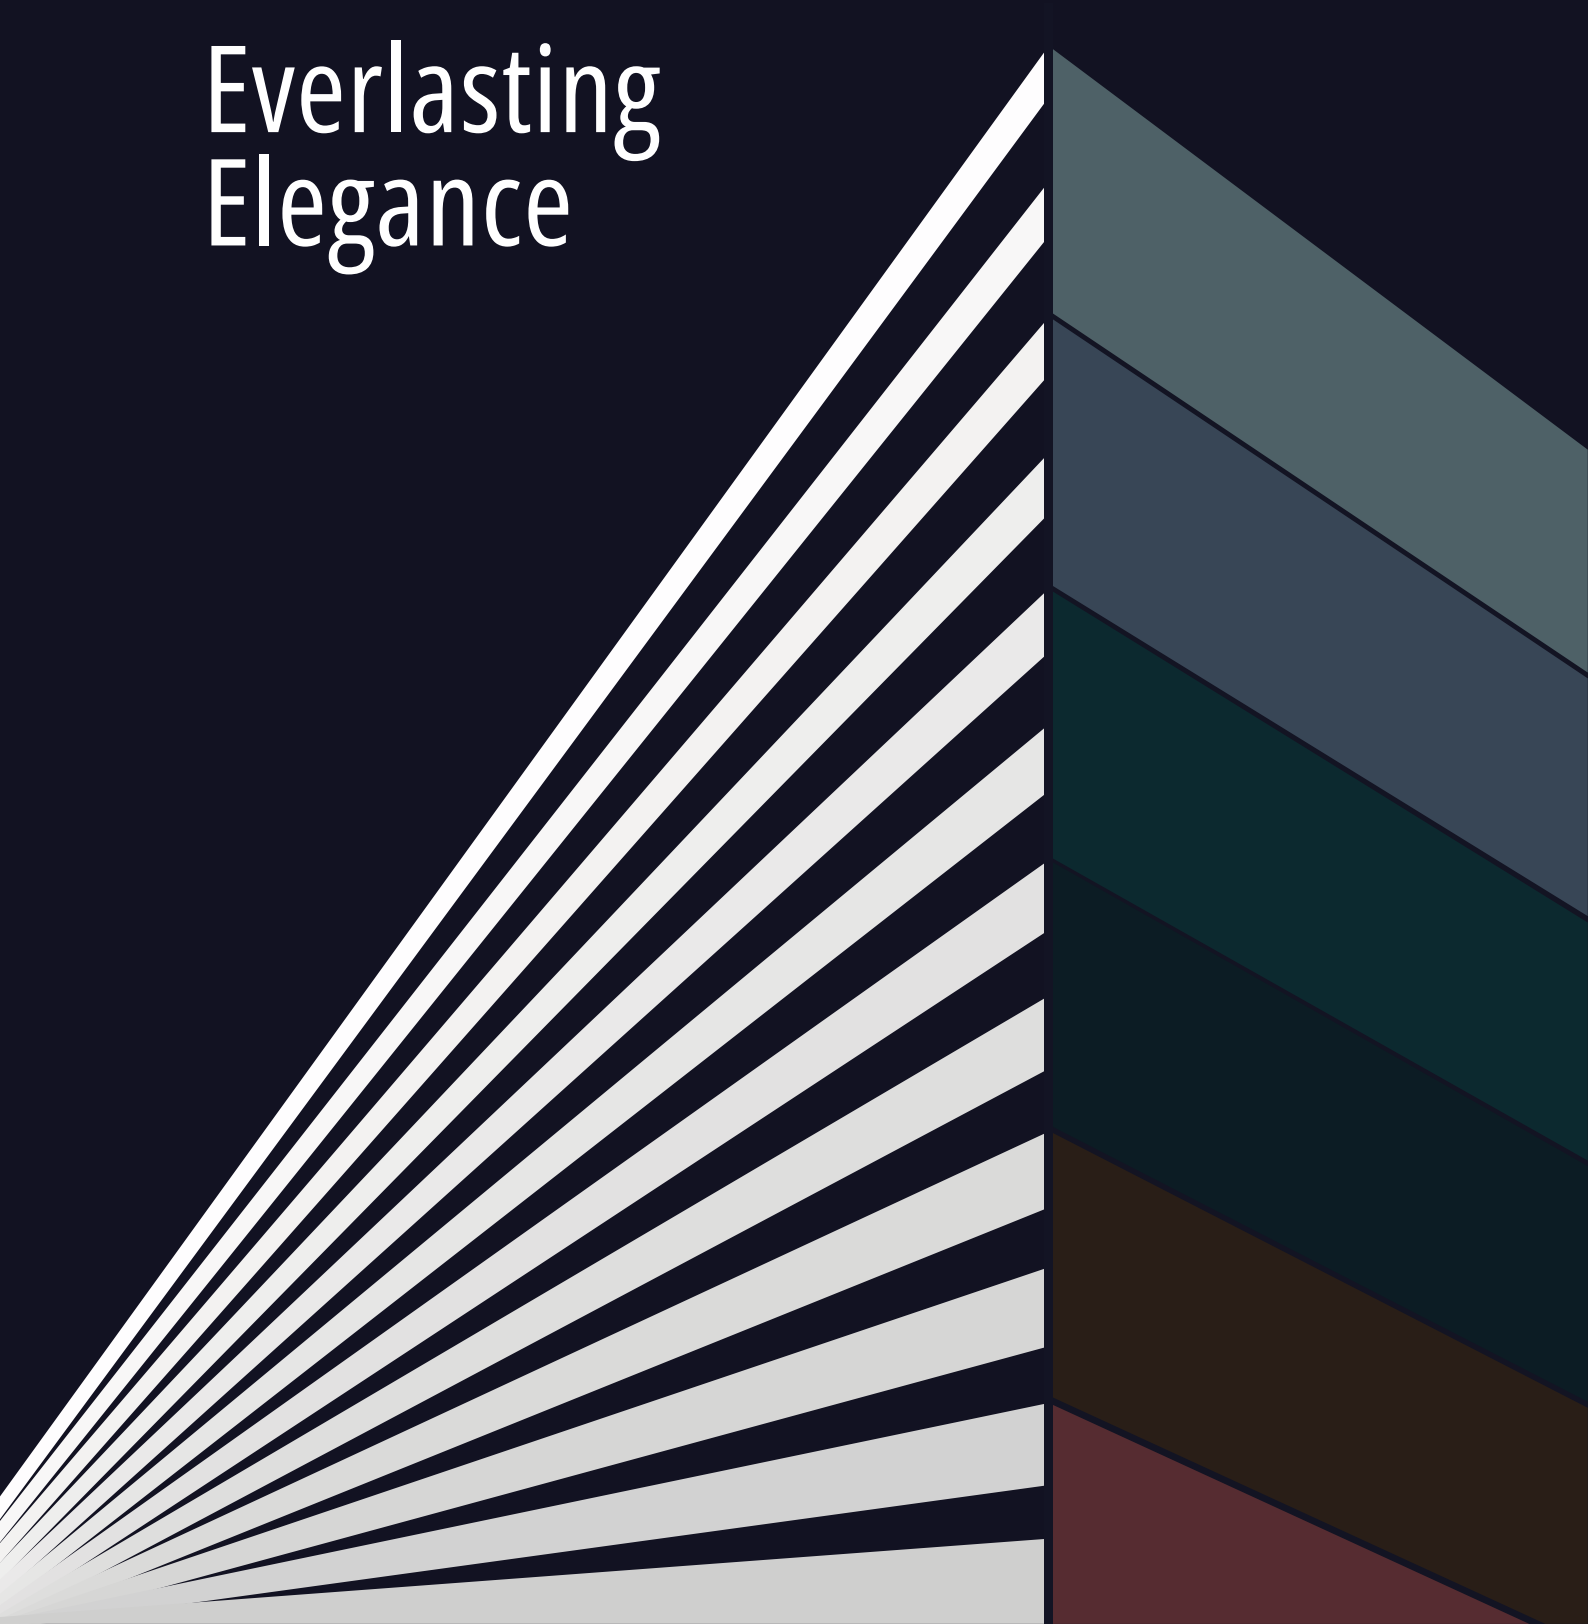


Effortless Appeal




Juxtaposing Red's passion with green's grace

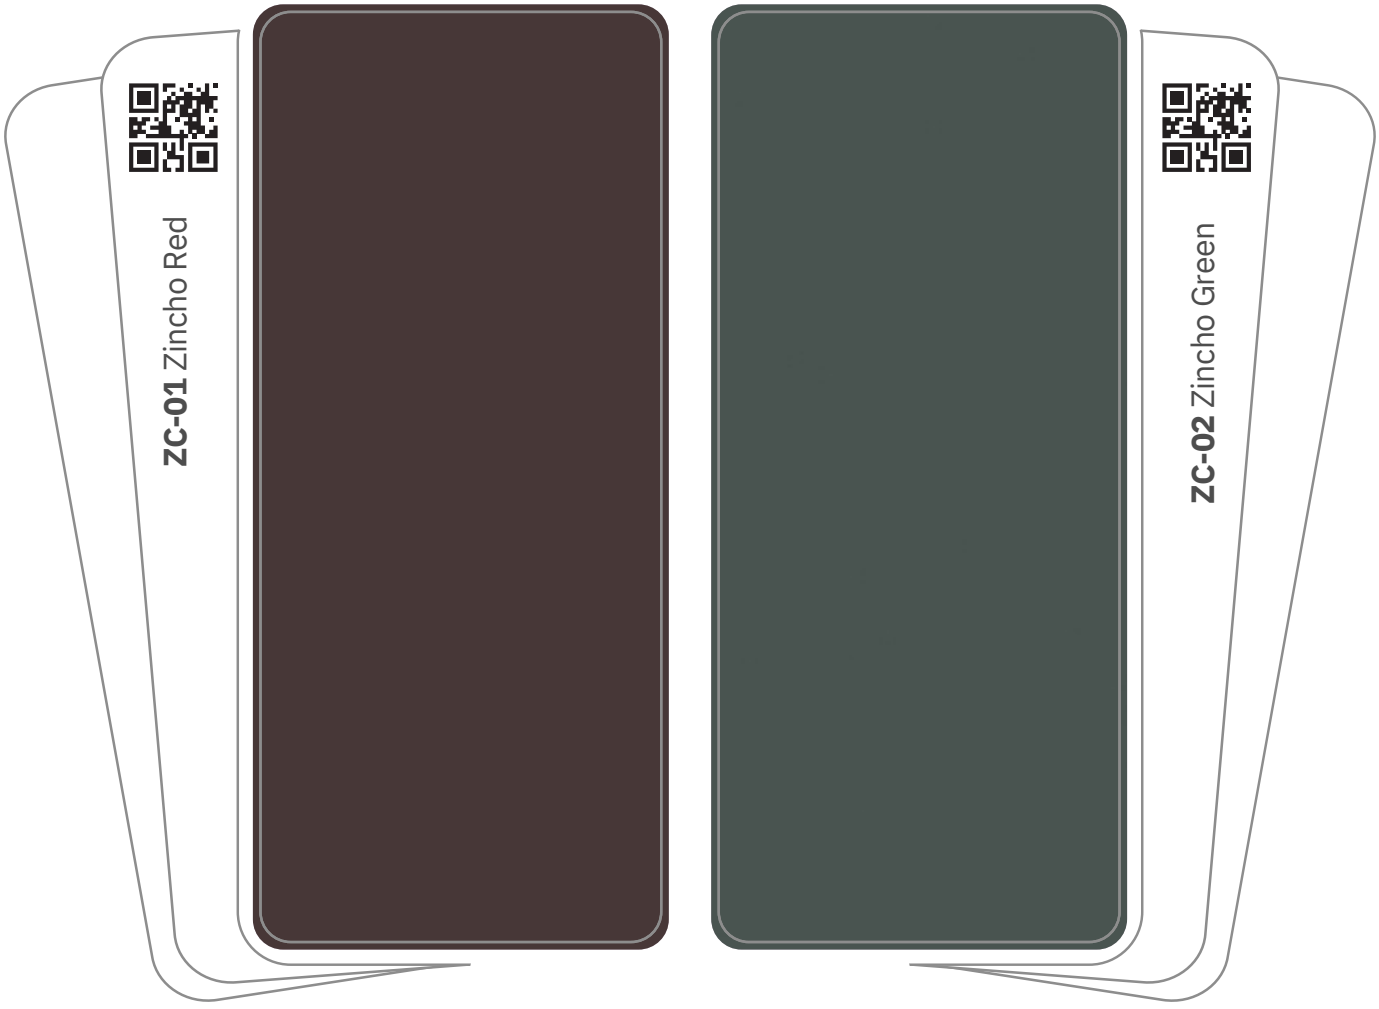

Apposing Blue's peace and brown's earth

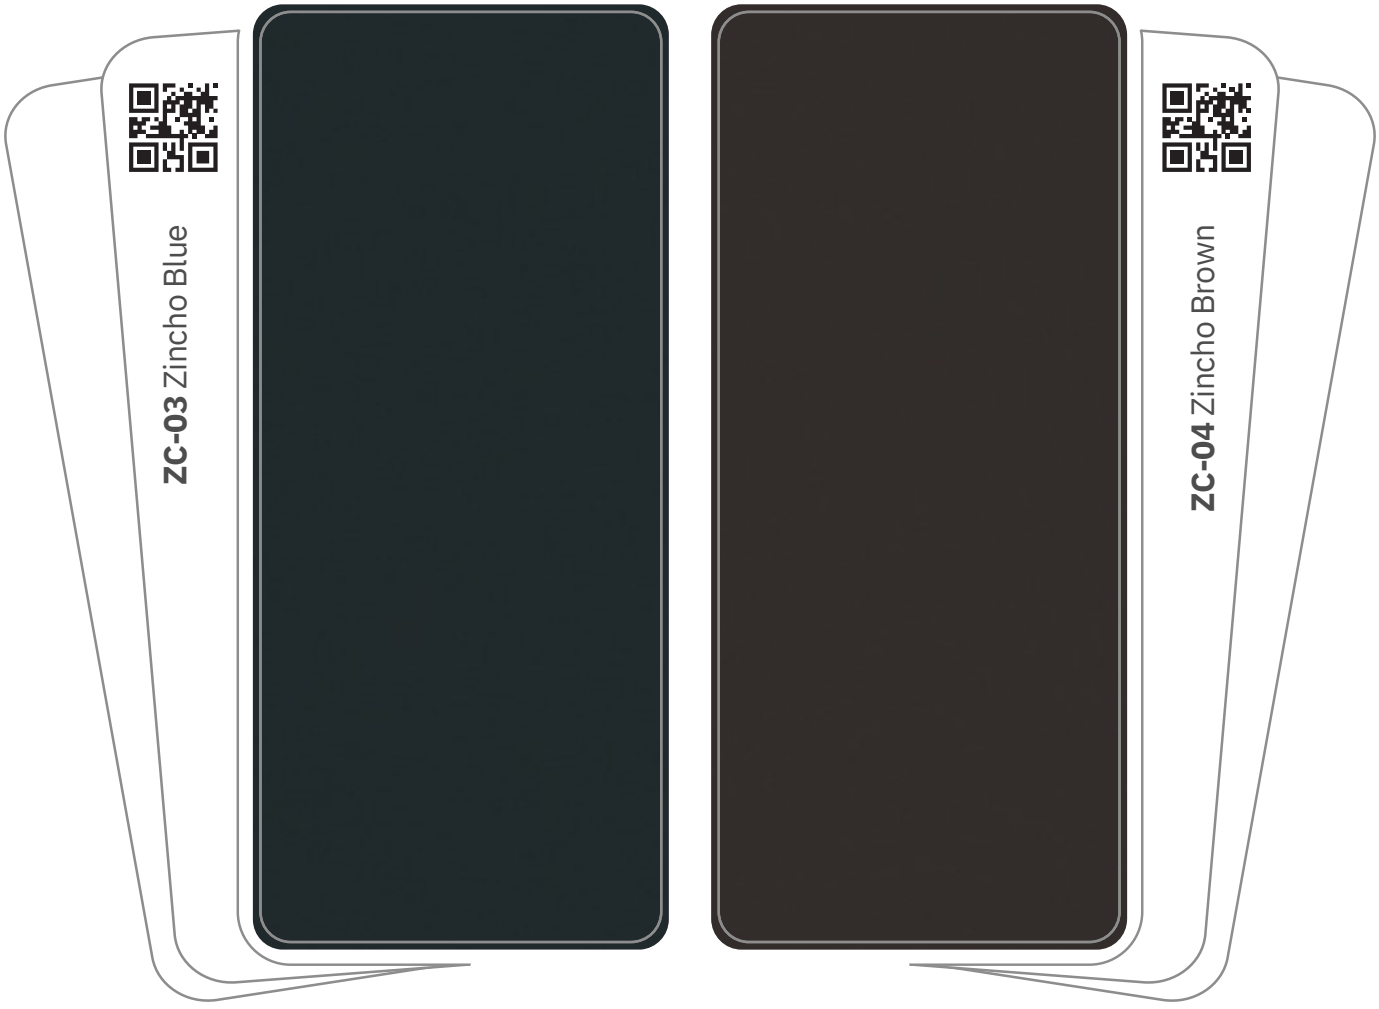

Subtle Brilliance

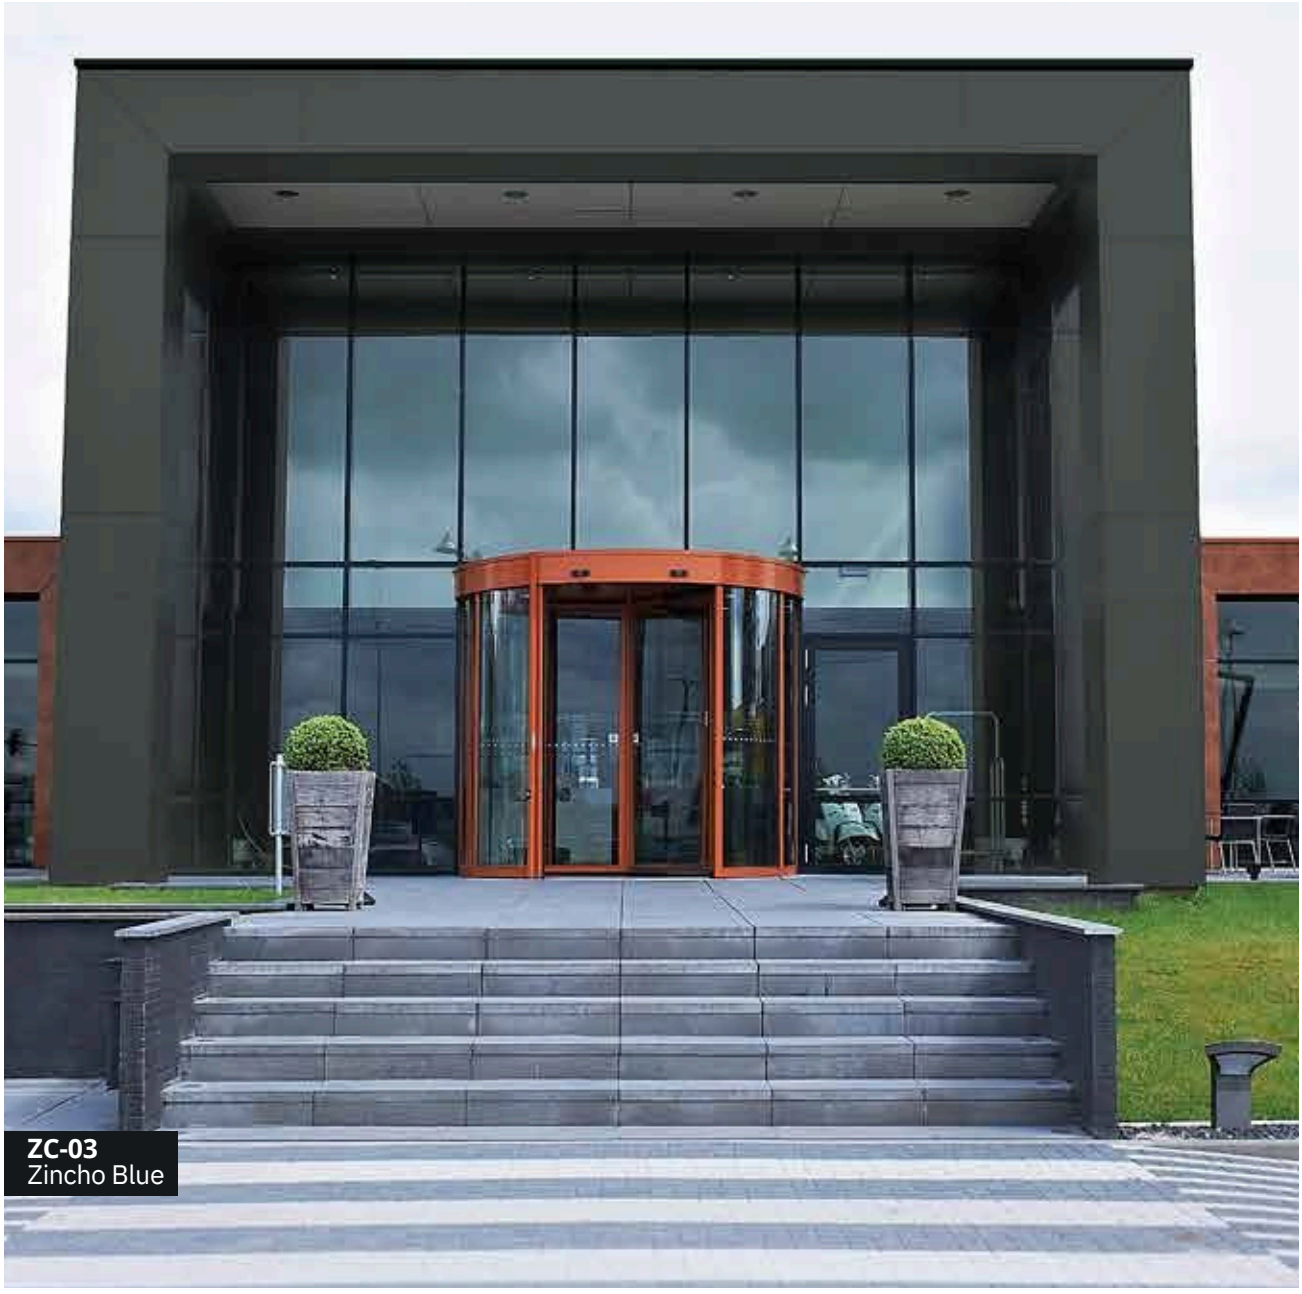

ZC-03
Zincho Blue

+91 9873501999, +91 9873409555 WWW. DHANVIQUE.COM

Melodic Intricacy



ZC-05
Zincho Quartz

Braiding Quartz's brilliance with Anthra's enigma



Timeless Allure



ZC-06
Zincho Anthra

+91 9873501999, +91 9873409555 WWW. DHANVIQUE.COM

Sl. No.	Particulars	Product Composition						
1	**PRODUCT GRADE**	AL 45		AL 43		AL 33		
2	**TOTAL THICKNESS OF THE PANEL**	4 mm		4 mm		3 mm		
3	**THICKNESS OF THE ALUMINIUM SKIN** (Top skin/Bottom skin)	O.5 mm		O.25 mm		O.25 mm		
4	**THICKNESS OF LDPE/ MINERAL CORE**	3 mm		3.5 mm		2.5 mm		
5	**GRADE OF ALUMINIUM SKIN**	AA 3105/*AA 5005 (Supplier – Hindalco)		AA 1100 (Supplier-Hindalco)		AA 1100 (Supplier-Hindalco)		
6	**COATING THICKNESS** (Front coil)	32 µ - 35 µ (Three coat paint system) **Suppliers:** Akzonobel/PPG/Beckers/ Nippon		32 µ - 35 µ (Three coat paint system) **Suppliers:** Akzonobel/PPG/Beckers/ Nippon		32 µ - 35 µ (Three coat paint system) **Suppliers:** Akzonobel/PPG/Beckers/Nippon		
7	**COATING THICKNESS** (Back coil) **PRODUCT TOLERANCE**	4µ - 7µ Service coat		4µ - 7µ Service coat		4µ - 7µ Service coat		
8		**WIDTH**	**LENGTH**	**THICKNESS**		**SQUARENESS**	**BOW**	
				COIL	**PANEL**		AL 45	AL 43 & AL 33
		±2.0 mm	±4.0 mm	±0.03 mm	±0.2 mm	Maximum 5.0 mm	Maximum 0.5% of width and/or and/or length	Maximum 0.8% of width and/or and/or length

*Zincho panels are also available in AA 5005 against minimum order quantity.

Best Practices Award from the European Society for Quality Research (ESQR), for Quality, R&D, Meticulous Test Metrics, First-rated Industry Practices and Best-in-class Products, received at Brussels, Belgium.

Aludecor MCPs can come in both Aludecor FireWall A2 and Aludecor FireWall. They have Factory Production Control certification from Emirates Safety Laboratory (ESL) for reaction to fire classifications of EN 13501-1 Class A2 – s1, d0 for FireWall A2 and EN 13501-1 Class B–s1, d0, DIN 4102 Class B1 for Aludecor FireWall.

#BeatTheFire

*Aludecor FireWallA2hasfireproofpropertiesclose to metals.

Silicone Free Cladding Profiles and Fixtures

Aludecor Systems are versatile and can be assembled quickly. They are a concealed fixing system of the following types . . .

Male
Female
Rainscreen

DHANVIQUE

TIMELESS ELEGANCE. ENDLESS POSSIBILITIES.

GET IN TOUCH TO BEGIN YOUR DESIGN TRANSFORMATION

Reach us at:

Dhanvique

+91 9873409555 | +91 9873501999

info@dhanvique.com

www.dhanvique.com

SCAN TO CONNECT